

data sheet **DE-613**

**DE-613** is an independent parking system with a pit. This smart solution is a combination of the DE-61 system with the DE-63 system.

**D2+3**

**EASY TO PLAN** with space saving construction.



**EASY TO INSTALL** with minimized parts construction.



**EASY TO USE** due to barrier free construction.




## 1. THE FUNCTIONALITY OF DE-PARK DIGITAL

Our Digital Series have a combination of lifting and sliding platforms. There is one sliding platform less than lifting platforms per system. A system with up to 10 segments and 19 parking spaces is possible.

You can choose your parking space with one touch at the control panel.

The example shows 3 grids with 5 parking places: 1 empty space is needed for the movement.

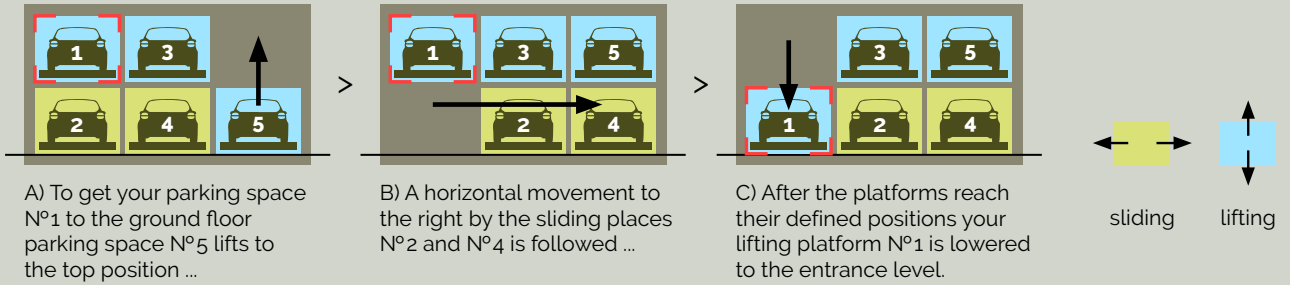


## 2. WIDTH OF PARKING SPACE / SYSTEM (IN CM)

- A = parking width
- B = segment width
- C = additional Space
- D = system width <sup>1\*</sup>

<sup>1\*</sup> Tolerance of dimensions on the construction site = 0 to + 3 cm

Parking width	Segment width	Additional space
A	B	C
230	250	10
240	260	10
250	270	10
260	280	10
270	290	10

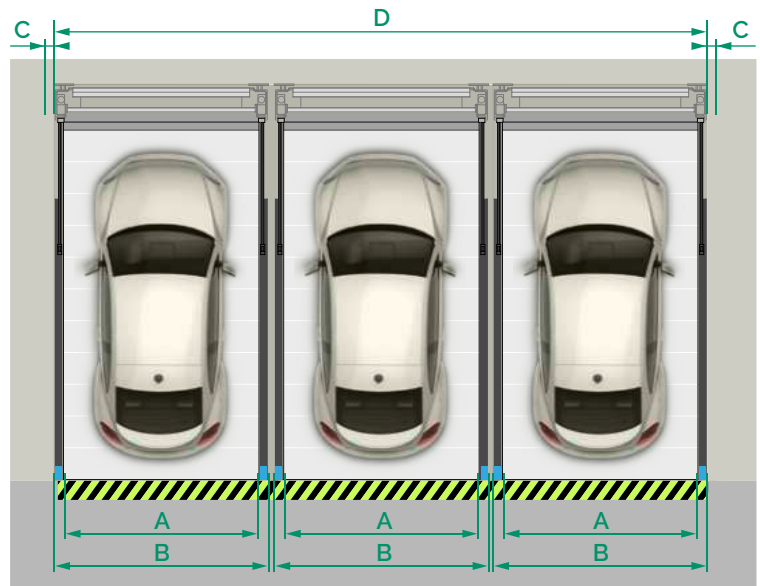


Parking width A	System width D	System width D	System width D	System width D	System width D	System width D	System width D	System width D	System width D
	2 seg. 3 cars	3 seg. 5 cars	4 seg. 7 cars	5 seg. 9 cars	6 seg. 11 cars	7 seg. 13 cars	8 seg. 15 cars	9 seg. 17 cars	10 seg. 19 cars
230	520	770	1020	1270	1520	1770	2020	2270	2520
240	540	800	1060	1320	1580	1840	2100	2360	2620
250	560	830	1100	1370	1640	1910	2180	2450	2720
260	580	860	1140	1420	1700	1980	2260	2540	2820
270	600	890	1180	1470	1760	2050	2340	2630	2920

## 1. THE FUNCTIONALITY OF DE-PARK DIGITAL

Our Digital Series have a combination of lifting and sliding platforms. There is one sliding platform less than lifting platforms per system. A system with up to 10 segments and 29 parking spaces is possible.

You can choose your parking space with one touch at the control panel.

The example shows 3 grids with 8 parking places: 1 empty space is needed for the movement.

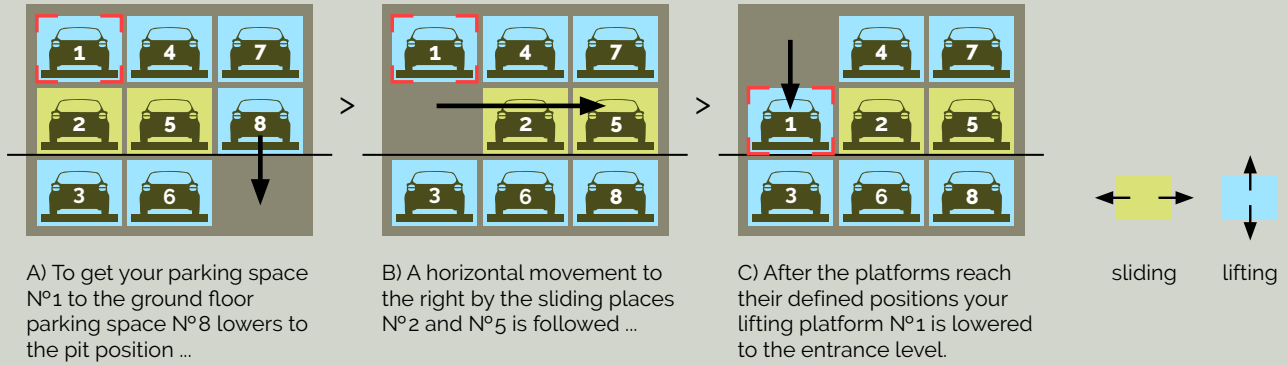


## 2. WIDTH OF PARKING SPACE / SYSTEM (IN CM)

- A = parking width
- B = segment width
- C = additional Space
- D = system width <sup>1\*</sup>

<sup>1\*</sup> Tolerance of dimensions on the construction site = 0 to + 3 cm

Parking width	Segment width	Additional space
A	B	C
230	250	10
240	260	10
250	270	10
260	280	10
270	290	10

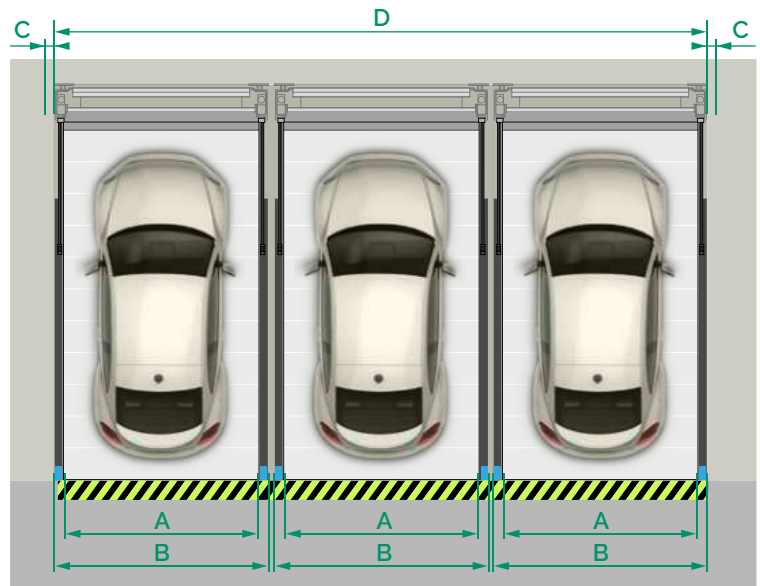

Parking width A	System width D	System width D	System width D	System width D	System width D	System width D	System width D	System width D	System width D
	2 seg. 5 cars	3 seg. 8 cars	4 seg. 11 cars	5 seg. 14 cars	6 seg. 17 cars	7 seg. 20 cars	8 seg. 23 cars	9 seg. 26 cars	10 seg. 29 cars
230	520	770	1020	1270	1520	1770	2020	2270	2520
240	540	800	1060	1320	1580	1840	2100	2360	2620
250	560	830	1100	1370	1640	1910	2180	2450	2720
260	580	860	1140	1420	1700	1980	2260	2540	2820
270	600	890	1180	1470	1760	2050	2340	2630	2920


3. PILLARS IN FRONT OF THE PARKING AREA

A	outer seg.	inner seg.	A	outer seg.	inner seg.	inner seg.	inner seg.	A	outer seg.	inner seg.	inner seg.	inner seg.	inner seg.	inner seg.
230	250	230	230	500	480	230	480	230	750	730	230	730	730	230
240	260	240	240	520	500	240	500	240	780	760	240	760	760	240
250	270	250	250	540	520	250	520	250	810	790	250	790	790	250
260	280	260	260	560	540	260	540	260	840	820	260	820	820	260
270	290	270	270	580	560	270	560	270	870	840	270	840	840	270

min.20

4. DIMENSIONS (IN CM)

H = clear height  
 C1/C2 = vehicle height bottom / top <sup>2\*</sup>

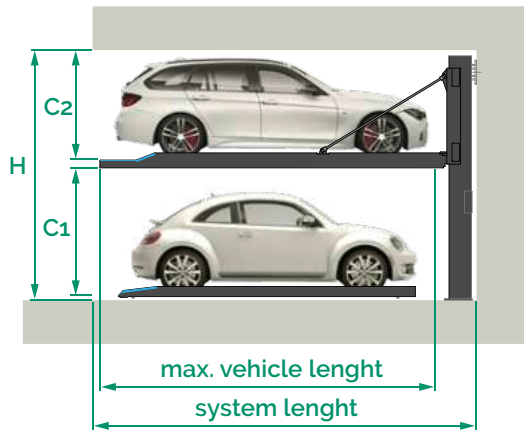

H	C1	C2	C1	C2	C1	C2		
330	150	150	-	-	-	-		
340	160	150	-	-	-	-		
350	170	150	or	160	160	-		
360	180	150	or	170	160	-		
370	190	150	or	180	160	or	170	170
380	200	150	or	190	160	or	180	170

<sup>2\*</sup> The vehicle height with roof rails, antenna and other height increases must not exceed the listed max. vehicle heights.

5. TECHNICAL DATA

Height


In areas with higher ceilings, taller vehicles can be parked on the top platform accordingly.

System length

For a 500 cm car length a 545 cm system length is necessary. A system length of 560 cm is recommended. This enables larger safety distances, if newer, longer vehicles are purchased.

Dimensions

- All dimensions are minimum finished dimensions in cm.
- Allow for tolerances to VOB Part C (DIN 18330, 18331) and additionally DIN 18202 (+ 30 mm / 0 mm).
- In case of partition walls 15x15 cm opening for hydraulik pipes are necessary in the walls. Do not close the opening after the installation.

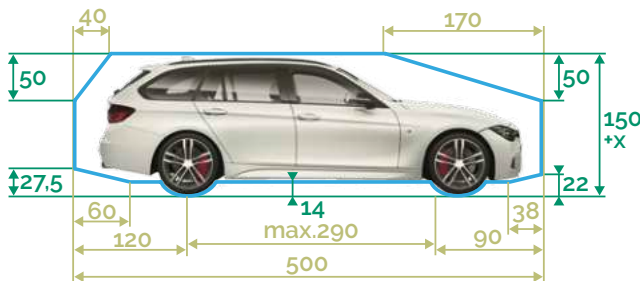


Maximum vehicle weight

- 2000kg / 500kg wheel load
- 2600kg / 650kg wheel load

3. PILLARS IN FRONT OF THE PARKING AREA

<b>A</b>	outer seg. inner seg.	<b>A</b>	outer seg. inner seg. inner seg. inner seg.	<b>A</b>	outer seg. inner seg. inner seg. inner seg. inner seg. inner seg.
<b>230</b>	250 230	<b>230</b>	500 480	<b>230</b>	750 730
<b>240</b>	260 240	<b>240</b>	520 500	<b>240</b>	780 760
<b>250</b>	270 250	<b>250</b>	540 520	<b>250</b>	810 790
<b>260</b>	280 260	<b>260</b>	560 540	<b>260</b>	840 820
<b>270</b>	290 270	<b>270</b>	580 560	<b>270</b>	870 840
	min.20		min.20		min.20

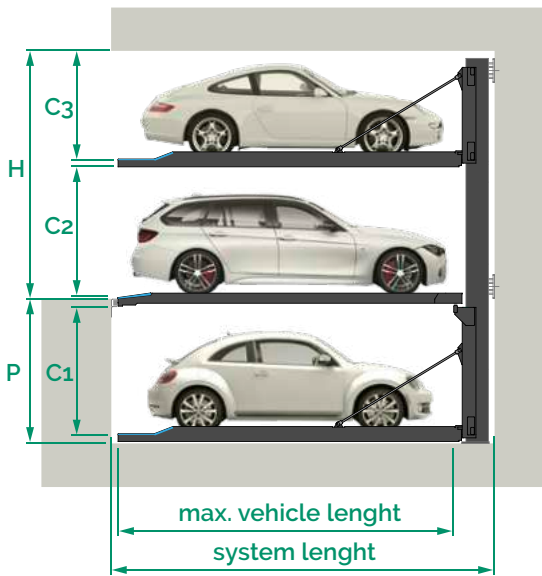

4. DIMENSIONS (IN CM)

H = clear height  
 P = pit depth  
 C1/C2/C3 = vehicle height bottom / top <sup>2\*</sup>

P	H	C1	C2	C3
175	320	150	150	150
180	325	155	155	150
200	345	175	175	150
210	355	185	185	150
220	365	195	195	150
230	375	205	205	150

<sup>2\*</sup> The vehicle height with roof rails, antenna and other height increases must not exceed the listed max. vehicle heights.

5. TECHNICAL DATA

Height


In areas with higher ceilings, taller vehicles can be parked on the top platform accordingly.

System length

For a 500 cm car length a 555 cm system length is necessary. A system length of 560 cm is recommended. This enables larger safety distances, if newer, longer vehicles are purchased.


Dimensions

- All dimensions are minimum finished dimensions in cm.
- Allow for tolerances to VOB Part C (DIN 18330, 18331) and additionally DIN 18202 (+ 30 mm / 0 mm).
- In case of partition walls 15x15 cm opening for hydraulik pipes are necessary in the walls. Do not close the opening after the installation.

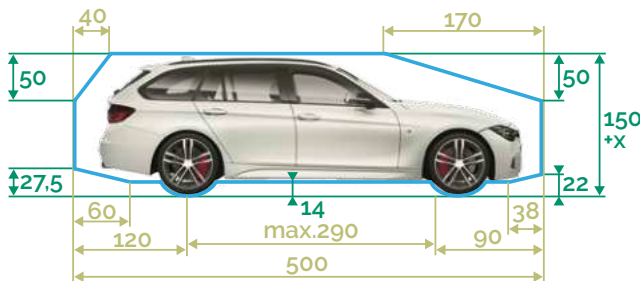

Maximum vehicle weight

- 2000kg / 500kg wheel load
- 2600kg / 650kg wheel load

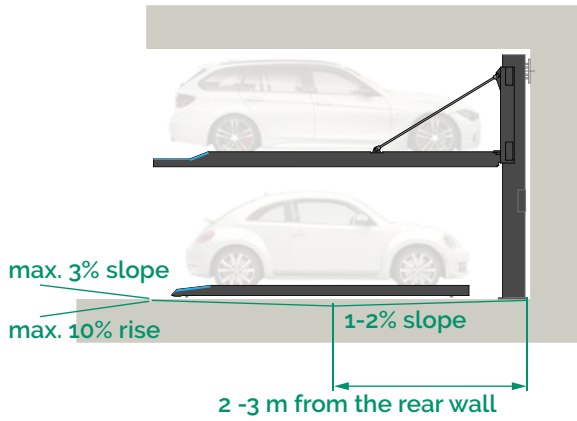

## 6. ACCESS CONDITIONS

With our innovative design the access to the parking place is very easy. Our flat profile over the complete platform provides higher comfort and driving safety. The light rise of the entrance to the parking place and the reduced side beam of the lifting platform allow an easy maneuvering and reduce the risk of wheel collision.

### Maximum slope / rise

- Max. 3% slope <sup>3\*</sup>
- Max. 10% rise <sup>3\*</sup>


### Drainage

- 1-2 % slope on the pit floor

<sup>3\*</sup> In case of higher values, safe access of the vehicle cannot be guaranteed by DE-PARK.

## 7. ANCHORING


- Systems are anchored into the floor and rear wall. The hole depth is approximately 13 cm.
- The quality of the concrete in the structure (for the parking system) must be at least C20/25.
- The precise position of the load application points depends on the selected system. For precise values, please contact DE-PARK.

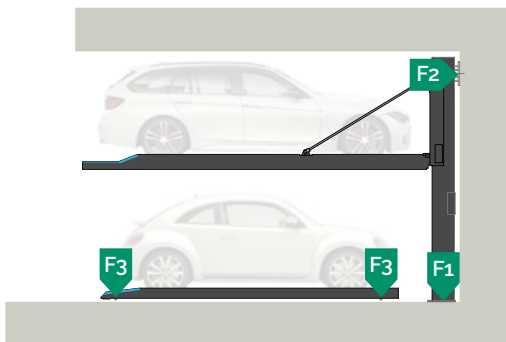


## 8. FORCES TO THE STRUCTURE

	2000 kg	2600 kg
F1	20 kN	25 kN
F2	20 kN	25 kN
F3	8 kN	10 kN

The force F2 can also be absorbed via the ceiling (ceiling fixation available upon request).

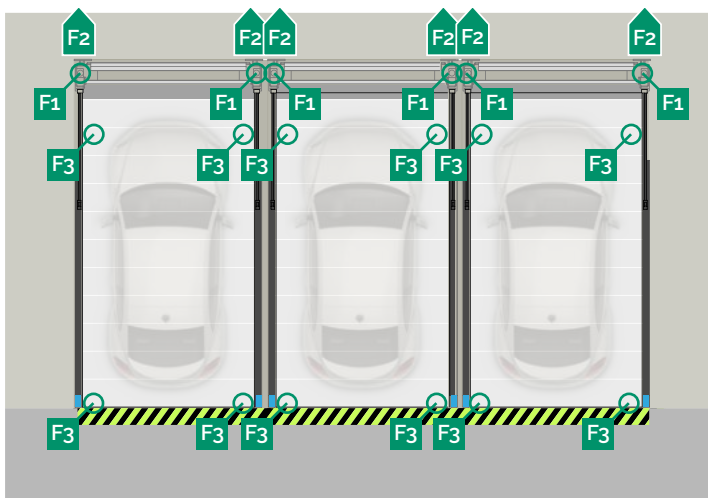

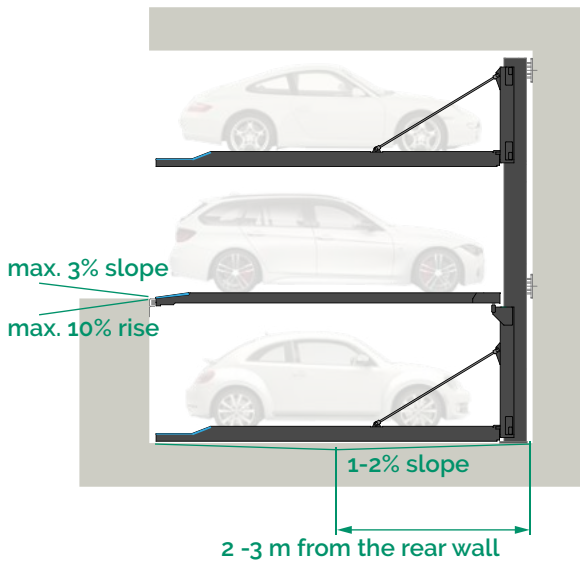

## 6. ACCESS CONDITIONS

With our innovative design, the accessibility of the parking place is simpler. Our flat profile over the complete platform provides higher level of comfort and driving safety. The straight entrance level and the reduced side beam of the lifting platform allow easy manoeuvring and reduce the risk of wheel collision.

### Maximum slope / rise

- Max. 3% slope <sup>3\*</sup>
- Max. 10% rise <sup>3\*</sup>

### Drainage

- 1-2 % slope on the pit floor

<sup>3\*</sup> In case of higher values, safe access of the vehicle cannot be guaranteed by DE-PARK.



## 7. ANCHORING

- Systems are anchored into the floor and rear wall. The hole depth is approx. 13 cm.
- The quality of the concrete in the structure (for the parking system) must be at least C20/25.
- The precise position of the load application points depends on the selected system. For precise values, please contact DE-PARK.

## 8. FORCES TO THE STRUCTURE

	2000 kg	2600 kg
F1	40 kN	48 kN
F2	33 kN	41 kN
F3	8 kN	10 kN

The force F2 can also be absorbed via the ceiling (ceiling fixation available upon request).

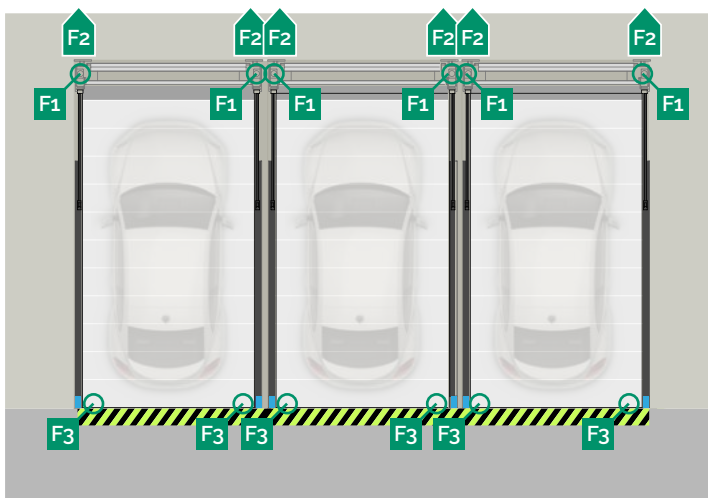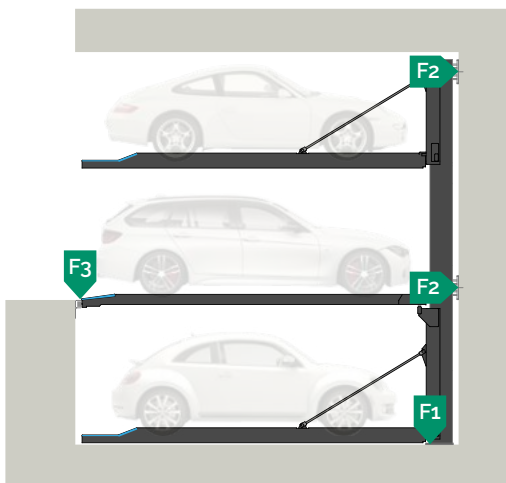



**To be provided from customer for each row:**

Item	Description
1	Electric meter
2	Fuse or automatic circuit breaker according to DIN VDE 0100 part 430, max. 16 A
3	According to local power supply regulations 3 PH + N + PE
4	Main switch lockable
5	Connection for the protective potential equalization DIN 60204
6	Protective bonding all 10m

**Operation of the gate:**

Option A – manually operated.  
 Option B – electrical drive per touch screen at the control unit. Additional operation with a remote control is optional.

**9. TYPE OF CONTROL**

**Interactive control unit:**

Our system DE-61 is controlled digitally. With one touch you can choose your parking place by using this control unit. You can view the progress of the provision on the screen. If the optional gate is not chosen, then the system works with a dead man's control.

**10. ELECTRICAL ELEMENTS**

**Connected load of unit:** 2x 3 kW / 400 V / 50 Hz



- The control cabinet must be placed outside the moving range of the system. We recommend positioning the cabinet near the system for a better overview of the system. The space in front of the cabinet must be minimum 1.00 m for opening the door and the operator.

**Services provided in the system:**

- Operator terminal including operator presence control with raising and lowering.
- Emergency stop placed outside of the system's range of movement.

**11. GATES (OPTIONAL)**

With our new innovative gates, we provide up to 50 cm wider entrance space than the requested parking space.

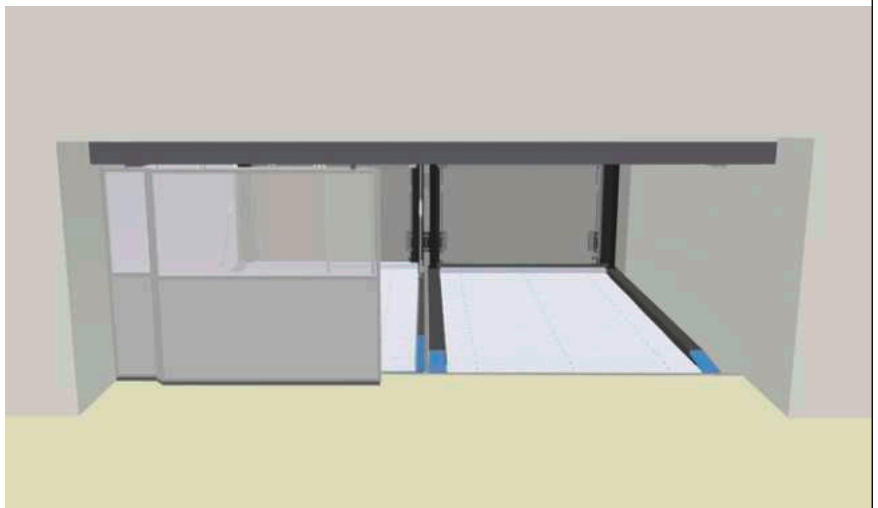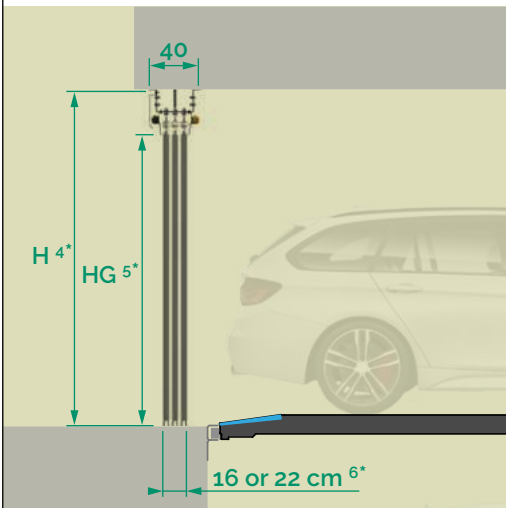

H 4\* = Clear height: 225 cm  
 HG 5\* = Entrance height: 200 cm

4\* Other dimensions are available on request  
 5\* Car height = HG - 5 cm tolerance  
 6\* 16 cm – if gates are for 2 segments /  
 22 cm – if gates are for 3 segments



## 12. SYSTEM-RELATED REQUIREMENTS

### Maintenance, cleaning & prevention

- The systems must be serviced and cleaned regularly. This applies more so if the systems and the platforms are exposed to aggressive substances such as salt, water, dirt, operating supplies, sand, etc.
- Adequate drainage must be ensured.

### Ventilation

The garage must be adequately ventilated.

## 13. LEGAL REQUIREMENTS



### Marking tape on the edge of the pit

According to EN 14010 / ISO 3864, a 10cm wide, black & yellow warning marking must be attached to the edge of the pit.




### Separating elements / Barriers

According to EN ISO 13857, separating elements or barriers must be installed in the pedestrian area / accessible areas around the parking system, including during installation.



### Fire safety

The garage design must fulfil the regional fire safety provisions. The requirements can vary. Therefore the situation must be clarified and information obtained in advance by the customer and then agreed and coordinated.



### Noise emissions

According to the noise insulation regulations for buildings to DIN 4109, a value of 30dB (A) must be complied with in occupied rooms and spaces. You receive a sound insulation package with the system for the required 30dB (A) insulation of the structure is also necessary. Sound reduction index min.  $R_w = 57\text{dB}$ .

## 14. REQUIREMENTS ON SITE

### Ambient conditions

Temperature range from -5 to +40 °C. Relative humidity max. 80%.  
Please contact DE-PARK in case of different conditions.

### Lighting

The parking spaces must be adequately illuminated on site as specified.

## 15. CE AND CONFORMITY

### The systems conform to ...

- EN 14010-2009-12 Safety of Machinery - Equipment for power driven parking of motor vehicles
- Machinery Directive 2006/42/EC



### Design changes

We reserve the right to continuously develop our product on the basis of technical progress and to make changes and/or modifications to parts, assemblies or overall, to processes and to standards with no advance notice.

## DE-PARK IS MAKING YOUR LIFE EASY:

GERMAN MADE WITH A SLIM & MODULAR DESIGN  
EASY PLANNING AND SETUP

LOW MAINTENANCE CONSTRUCTION  
EASY TO USE WITH LOW NOISE EMISSIONS

NO PILLARS IN THE ENTRY AND PEDESTRIAN AREA  
EASY MANOEUVERING AND SENSORLESS POSITIONING

FLAT & CONTINUOUS PLATFORM  
EASY TO CLEAN AND COMFORTABLE TO WALK ON



DE-PARK GmbH  
Brühl 6  
04109 Leipzig  
Germany

Phone: 0049 (0)341 - 24700 131  
Fax: 0049 (0)341 - 24700 132  
Email: [info@de-park.com](mailto:info@de-park.com)  
Web: [www.de-park.com](http://www.de-park.com)